


DSP9331 DSP9332 DSP9341 DSP9342

Audio and Video Intercom Terminal

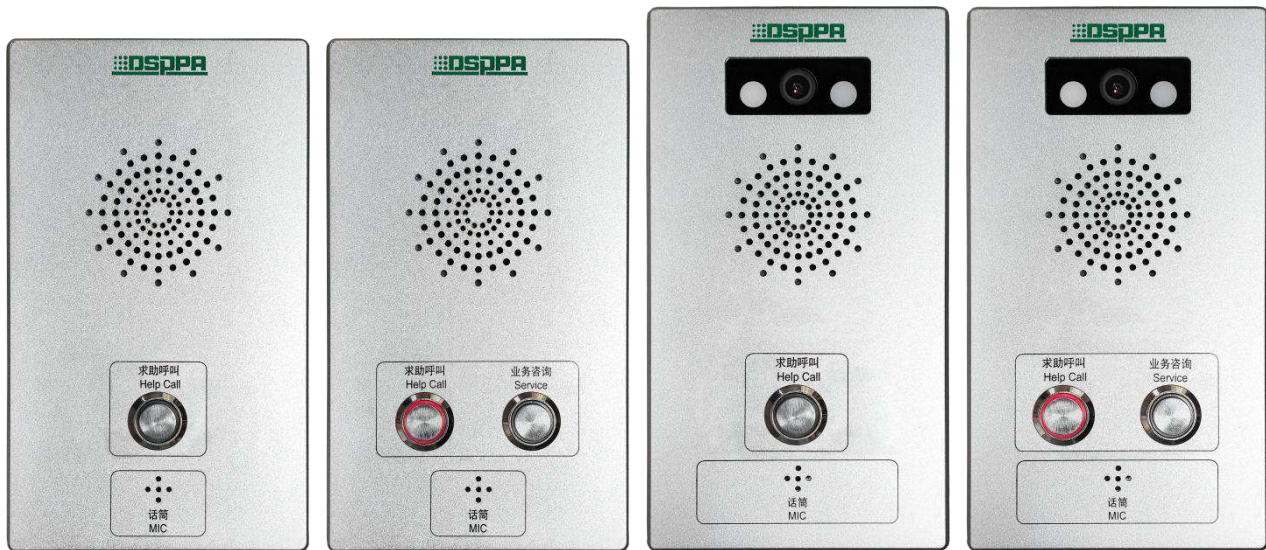

Description

The product is an all-digital network-based intercom device with a proven VOIP solution at its core, stable and reliable performance; adopts hands-free digital full duplex mode for clear and loud voice; offers user-friendly buttons, easy installation, classy design, sturdiness and durability, as well as low power consumption.

Features

- With two SIP lines.
- Support full-duplex hands-free calling.
- With editable call button (speed dial button, intercom button, etc.).
- Flush or wall-mounted installation.
- Support PoE power.
- With 3 functions in 1 terminal: Intercom, broadcast, and emergency paging.
- Meet IP65 protection level.


Specifications

| Model | DSP9331 | DSP9332 | DSP9341 | DSP9342 |
|------------------------|---------------|---------|---------|---------|
| Communication Protocol | SIP 2.0 | | | |
| Audio Amplifier | 1W | | | |
| Voice Streaming | Adjustable | | | |
| | Full Duplex | | | |
| | Hands-Free | | | |
| | Support (AEC) | | | |

| | | | |
|--|---------|----------------------------------|--------------|
| Interface | Speaker | 1 (XH2.54 connector) | |
| | LAN | 10/100BASE-TX s Auto-MDIX, RJ-45 | |
| Power Supply | | PoE powered or DC 12V/2A | |
| Recommended Cable | | CAT5 or higher | |
| Operating Temperature | | -40°C~70°C | |
| Relative Humidity of Operating Environment | | 10%-95% | |
| Storage Temperature | | -40°C~70°C | |
| Machine Dimensions (mm) | | 194*115*54mm | 214*115*54mm |
| Package Dimensions (mm) | | 265*245*80mm | 285*245*80mm |
| Gross Weight | | 1.5 kg | 1.6 kg |
| Net Weight | | 0.9 kg | 1 kg |

Front / Rear Panel

Front Panel

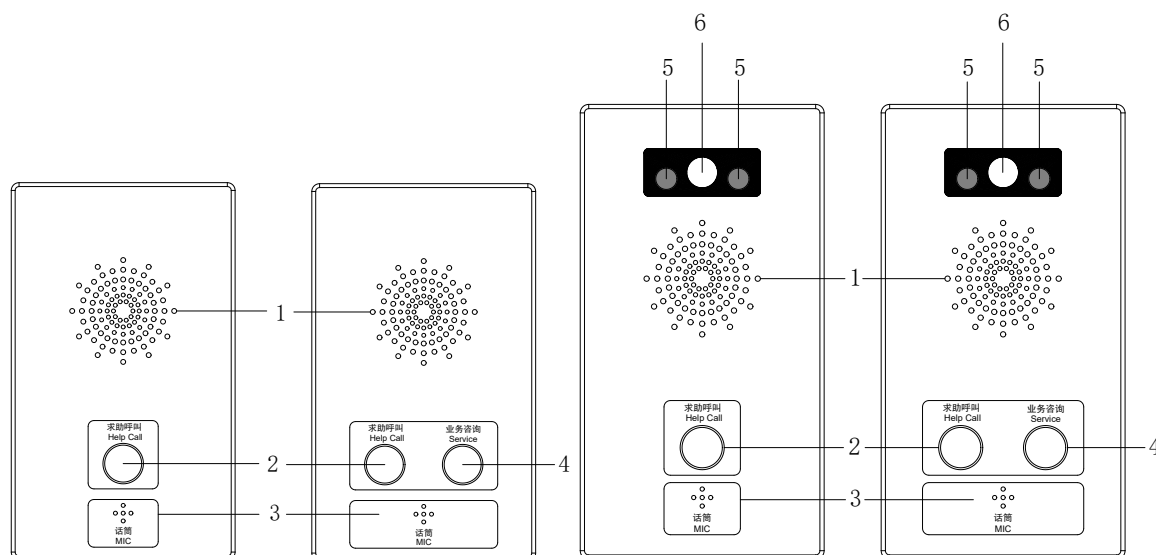

1. Built-in Speaker

2. Emergency Help Button

➤ After clicking this button, the lights will be different in different states.

Note: When the device is powered on, the light will be on for 1s; when it goes offline, the light will be off; when it is online and idle, the light will flash slowly; when it is waiting to be answered, the light will flash quickly; when it is in the intercom state, the light will be normally on.

3 Built-in MIC

Input voice for help intercom.

4 Service Inquiry Button


When a service inquiry is required, press the button to send a service inquiry signal.

5 Fill Light

During the intercom, when a darker environment is detected, the fill light will be turned on until the intercom is finished.

6 Camera

Rear Panel

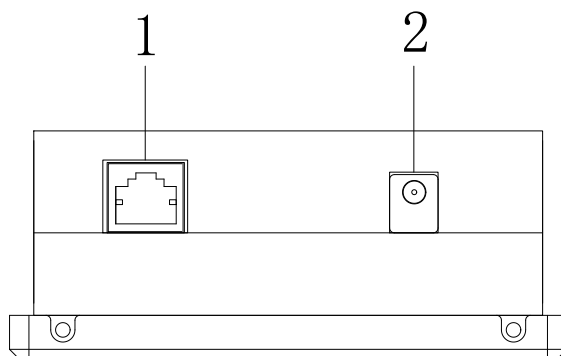

1. POE/NET Port

When used as a data and power transmission interface, it is connected to a PoE switch with 48V and AT output mode; when used as a data transmission interface only, it is connected to a normal switch with a network port.

2. DC12V Power Connector