


DM968

10" Tuya Smart Central Control Background Music Amplifier

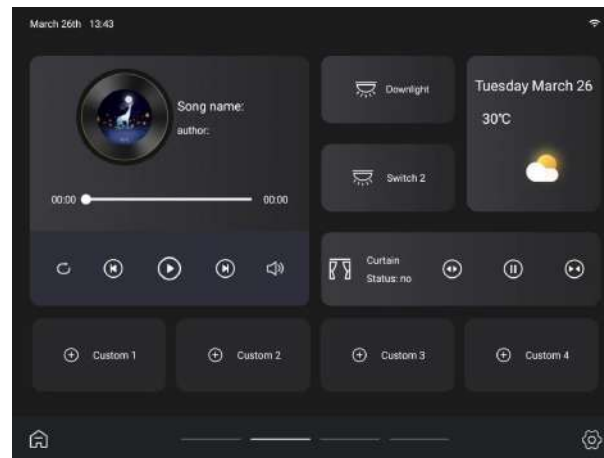

Description

Our Tuya smart central control background music amplifier adopts a 10" TFT digital HD screen (1280*800 HD resolution), and supports multi-point capacitive touch, with 4-core 2G running processor and Android 8.1 system for the main chip. The unit holds 2GB RAM and 8GB ROM.

It has WIFI, Bluetooth, ZigBee gateway and built-in speaker; and can control smart devices for music, weather, cross talks, radio stations, etc., and control media (play/pause/previous/next, alarm clock, volume settings).



Features

- Support control for songs, news, stories, Children's books, weather forecasts.
- Can control smart home control.
- Support mobile devices to push music via Bluetooth.
- Support TF card and 2.0 USB port, which can be connected to a hard disk.

Specifications

| Model | DM968 |
|------------------------|---------------------------|
| Power Input | AC 90-250V |
| Built-in Speaker | 8Ω 1W |
| Display Screen | 10" TFT digital HD screen |
| Microphone Head | Dual-microphone voice |
| Operating System | Android 8.1 |
| Bluetooth Distance | 10m |
| Cable Box Cut-Out Size | 86*86*30mm |
| Product Dimensions | 242*173mm |

Host Appearance & Ports

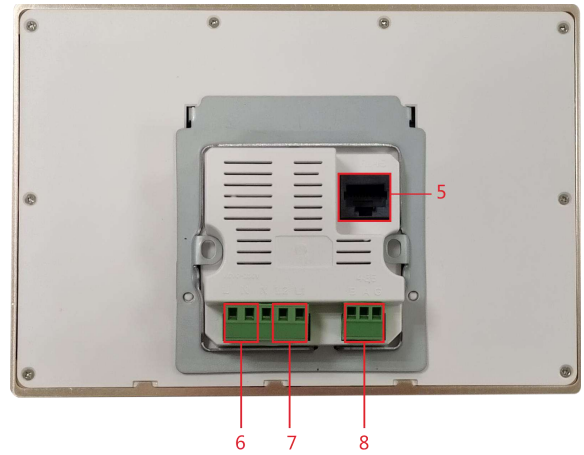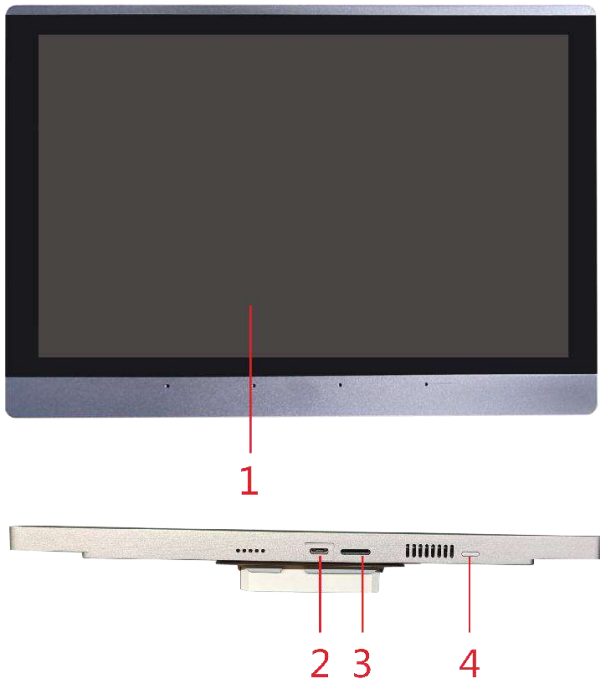

1. Display screen.
2. Mini USB port: Can be connected to a standard 1.1 or 2.0 USB flash drive through a connector, up to 32G capacity.
3. TF card slot: Insert a TF card into the slot with the notch to the right, up to 32G capacity.
4. Power button: Press and hold the button for 3 seconds to power it on, and press and hold the button for 3 seconds to power it off when it is powered on; short press the button to enter sleep, and short press the button again to wake it up.
5. Network port.
6. Power input cord: Two-strand copper core wire, with single-strand copper core of more than 0.75 square.
7. Connect two light switches.
8. 485 control cable: Two-strand copper core wire, with single-strand copper core of more than 0.75 square.