

## D6235 D6236

### Embedded Voting Chairman / Delegate Unit



#### Description

The D6235 and D6236 are embedded voting conference units designed for digital conference systems. Featuring a sleek flush-mount structure and intuitive button operation, the units provide efficient and reliable voting functions for conference applications. When integrated with the conference system host, they support functions such as button sign-in and flexible voting control. Powered by the host, the units ensure stable performance and seamless integration in modern meeting environments.


#### Features

- Conference unit dedicated to voting function.
- Exquisite embedded structure design.
- Excellent resistance to mobile phone interference.
- Supports button sign-in function.
- Each conference unit has a unique ID number.
- Passive device powered by the system host (24V DC).
- Chairman unit supports priority function for initiating and stopping voting.
- Chairman unit connection position is unrestricted.


#### Specifications

Model	D6235 D6236
Overall Dimensions (W × D × H)	140 × 63 × 75 mm
Panel Dimensions (W × D × H)	140 × 63 × 6 mm
Chassis Dimensions	130 × 45 mm
Package Dimensions	510 × 210 × 165 mm
Net Weight	1 kg
Gross Weight	2 kg

### Button and Indicator Functions

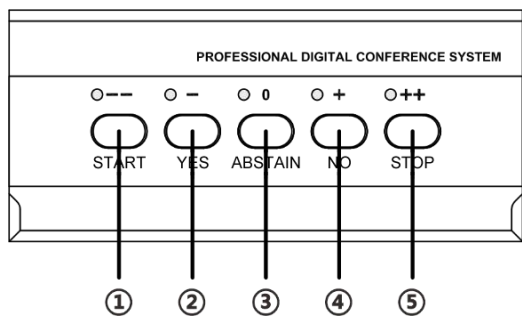


Top View of Chairman Unit

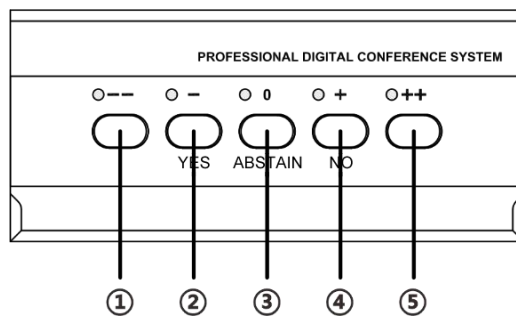

Top View of Delegate Unit

1. "--" button. Chairman unit: start voting; Delegate unit: rating operation.
2. "-" button – voting / rating operation.
3. "0" button – voting / rating operation.
4. "+" button – voting / rating operation.
5. "++" button. Chairman unit: end voting / return; Delegate unit: rating.

### Rear Panel

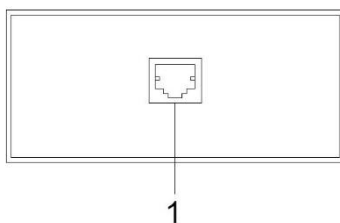

1. RJ45 port. Connects to audio interface box CH1 or CH2 channel A.