

DSP642

Landscape Waterproof Rock Speaker



Description

DSP642 is a landscape/garden speaker with a built-in 70V/100V transformer. The 70V/100V transformer system reduces line losses over longer distances and allows easy parallel connection of multiple loudspeakers. The high-quality resin enclosure features a rock-like shape and is weatherproof, with a heavy-duty damage-proof finish. It enables easy and secure installation in outdoor areas. This speaker is an ideal choice for industrial and commercial applications in outdoor areas, such as train stations, shopping malls, parking areas, and factories where background music and public address announcements are required

Features


- IPx6 waterproof level
- Max SPL: 98±2dB
- 6.5"×1 full-range driver
- high-class resin material
- High sensitivity: 88±2dB
- Heavy damage proof finish
- Built-in 70V/100V transformer
- Wide Freq.Resp.:80Hz-16kHz
- Power taps at 10W-20W@100V
- Landscape garden loudspeaker

Specifications

Model	DSP642	
Full-range	6.5"×1	
Rated Power	10W	
Max Power	20W	
Rated Voltage	70V	5W-10W
	100V	10W-20W
Sensitivity(1M,1W)	88±2dB	

Max SPL(1M)	98±2dB
Freq. Resp	80Hz-16kHz
Dimension(L×W×H)	400×320×400mm
Weight	6.3kg

DIMENSIONS

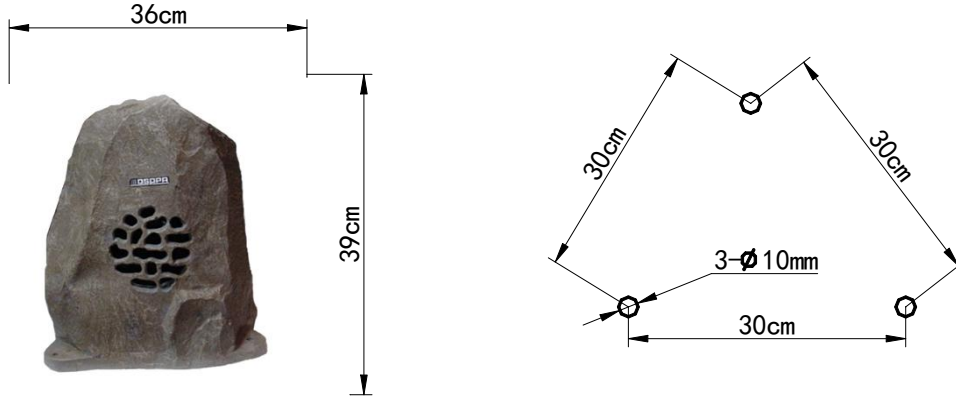

Installation


1. Setup a foundation like a round platform with concrete and set 3 screws (8mm) stretching out 3cm in it as shown above after concrete acidify continue;
2. Connect audio broadcasting wire to the speaker terminals according to the table below;

Power Line Voltage	70V	100V
Red---Blue	5W	10W
Red---White	10W	20W

3. Fix the speaker system with 3 nuts on screws of the foundation;
4. Finally, examine whether it is steady.

FREQ. RESPONSE

(dB SPL、1W、1m)

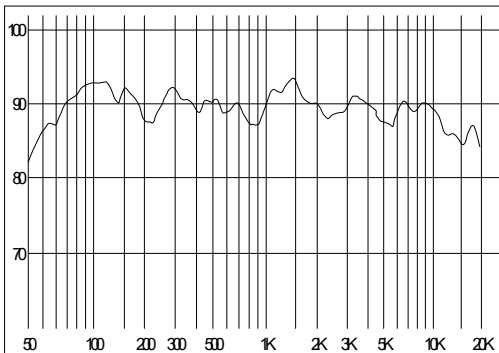

DISTORTION

(THD< 1.5% 1W、1m、2000Hz~10kHz)

