

POE6368

Network Outdoor Waterproof Column Speaker



Description

The POE6368 Network PoE Outdoor Waterproof Column Speaker is modern network play terminal with an overall design of processor and column speaker, which combines a network full-digital analog-to-digital signal processor with high fidelity speaker based on the TCP / IP protocol network. It can be mounted at any place where the network can reach. The machine can output the remote audio data streaming as audio signal and give a sound directly from the speaker via intelligent control of the host.

Features


- All-weather design, waterproof unit, applicable to indoors and outdoors, long service life, high sensitivity (89 ± 2 dB), clear and bright sound.
- Can be mounted at any place where the network can reach.
- Support maximum sampling rate of 48kHz and 16bit digital audio stream decoding.
- Built-in 2*10W digital amplifier, low power consumption.
- Can play background music, emergency paging and alarm signal from the system host.
- Can control the local output volume and local play status.
- Provide complete interfaces in compliance with the IEEE 802.3af/at standard for PoE system.

Specifications

Model		POE6368
Acoustic System	Driver Unit	4"×3, 2.5"×1
	Sensitivity (1m,1W)	91±2dB
	Max.SPL(1m)	106±2dB
	Frequency Response	140Hz-14kHz
	Rated Power (RMS)	18W
Amplifier System	NET Play	Freq. Resp.
	Built-in Amplifier	Distortion
	SNR(A-Weighted)	≥70dB

Work Environment Temperature	-40-70°C
Power Supply	48V PoE, IEEE802.3at standard
Outer Dimension (L×W×H mm)	555×320×205
Machine Dimension (H×W×L mm)	510×150×125
Gross Weight	5.1kg
Net Weight	3.6kg

Front / Rear Panel

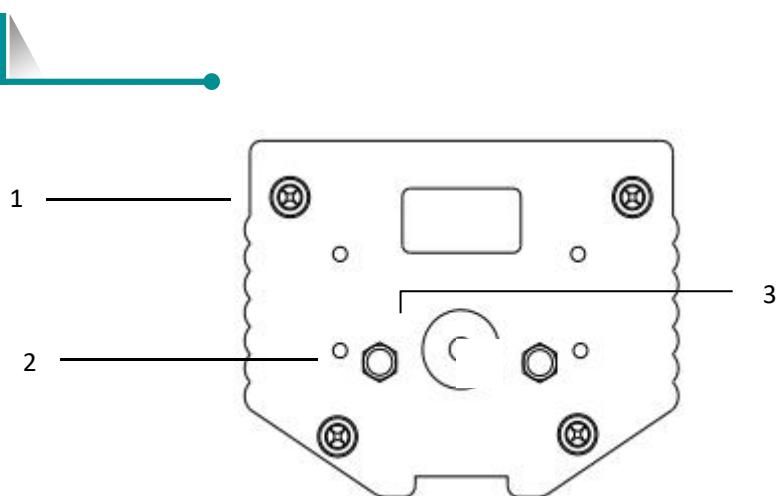

1. Mounting Hole

2. PoE IN

Connected to 48V power supply IEEE802.3at standard switcher.

3. Mounting Hole