

Concentrating on audio since 1988

# DM835 Smart Music Player with Amplifier



#### **Features**

- Standard 86 box, luxurious appearance design with LED screen
- $\triangleright$  Built-in 2x10 W high efficient amplifier @ 8Ω
- Music source: USB, Micro SD, Bluetooth and FM, 2 AUX inputs
- Can store 20 radio channels, support automatic and manual search
- ➤ Wide Freq. Response 20Hz~20kHz for excellent music effect
- Support common music format as MP3, WMA, WAV, FLAC, etc.
- With remote controller for convenient use

### **Description**

DM835 is a convenient and efficient home music control center. It has black and white colors, with luxurious appearance design, pure and noble. It has abundant audio sources, including FM, SD, BT, USB, AUX1, AUX2, can realize quick and convenient play. The speaker outputs are 8 ohms low-impedance outputs and the frequency response is 20Hz-20 kHz. Supports FM radio, and it can store 20 channels. The audio formats include MP3, WMA, WAV, FLAC and so on. It support infrared remote controller, and has a LED display screen. You can see that the time, the title and the total number of songs on the screen. You also can control the volume, working state by buttons and remote control.


It is very suitable for offices, restaurants, shops, bedroom, etc.

Professional Audio Manufacturer




#### Concentrating on audio since 1988

#### Panel Introduction

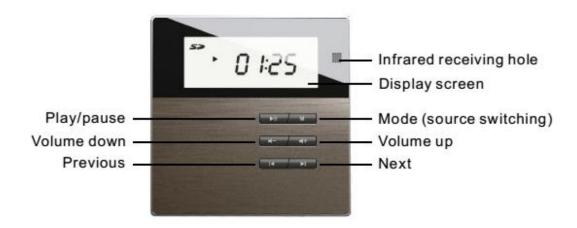



### Dimension






2



#### Concentrating on audio since 1988

### Remote Controller



- 1. Standby switch
- 2. Mode selection
- 3. Mute
- 4. Voice mode selection
- 5. Menu
- 6. Play control area
- 7. Play mode selection
- 8. Number key area

## Specification

Model:	DM835
Output Power	2 x10W
Impedance:	8Ω
Harmonic distortion	≤0.03% (1kHz,1W,8Ω
The ratio of signal to noise	>81dB
Frequency response	20Hz -20kHz
Memory card capacity	128MB-32GB
Audio format	MP3, WMA, WAV, FLAC, etc.
Bluetooth	BT2.1+EDR
Power supply	AC 100-240V/50-60Hz
Product dimension	86*86*38MM (L*W*H)