


DM958

8" Tuya Smart Central Control Background Music Amplifier

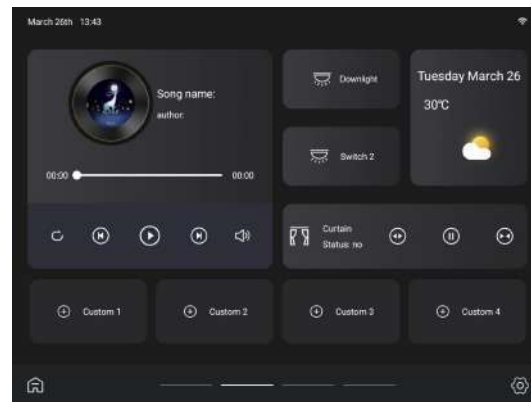

Description

Our Tuya smart central control background music amplifier adopts an 8" TFT digital HD screen (1440*1080 HD resolution), and supports multi-point capacitive touch, with 4-core 2G running processor and Android 8.1 system for the main chip. The unit holds 2GB RAM and 8GB ROM.

It has WIFI, Bluetooth, ZigBee gateway and built-in speaker; and can control smart devices for music, weather, cross talks, radio stations, etc., and control media (play/pause/previous/next, alarm clock, volume settings).


Features

- Support control for songs, news, stories, Children's books, weather forecasts.
- Can control smart home control.
- Support mobile devices to push music via Bluetooth.
- Support TF card and 2.0 USB port, which can be connected to a hard disk.

Specifications

Model	DM958
Power Input	AC 90-250V
Built-in Speaker	8Ω 1W
Display Screen	8" TFT digital HD screen
Microphone Head	Dual-microphone voice
Operating System	Android 8.1
Bluetooth Distance	10m
Cable Box Cut-Out Size	86*86*30mm
Product Dimensions	182*130mm

Host Appearance & Ports

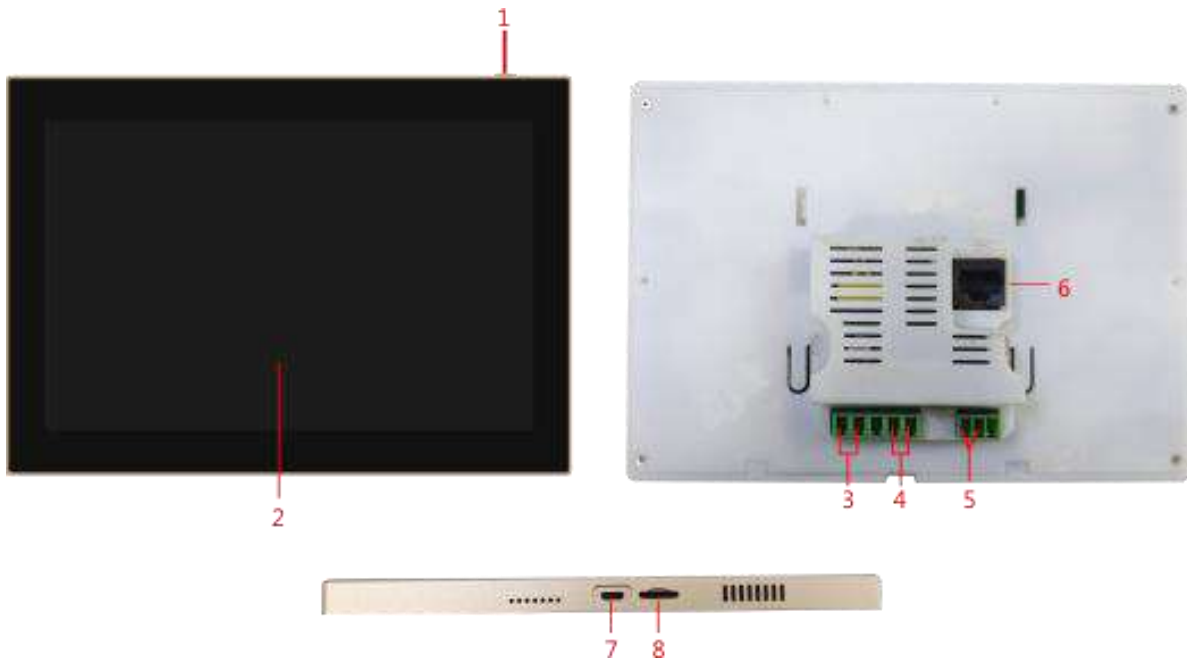

1. Power button: Press and hold the button for 3 seconds to power it on, and press and hold the button for 3 seconds to power it off when it is powered on; short press the button to enter sleep, and short press the button again to wake it up.
2. Display screen.
3. Connect the power cord (220V).
4. Connect two light switches.
5. 485 control cable: Two-strand copper core wire, with single-strand copper core of more than 0.75 square.
6. Network port.
7. Mini USB port: Can be connected to a standard 1.1 or 2.0 USB flash drive through a connector, up to 32G capacity.
8. TF card slot: Insert a TF card into the slot with the notch to the right, up to 32G capacity.