


DSP6030

30W 6.5" Coaxial Ceiling Speaker

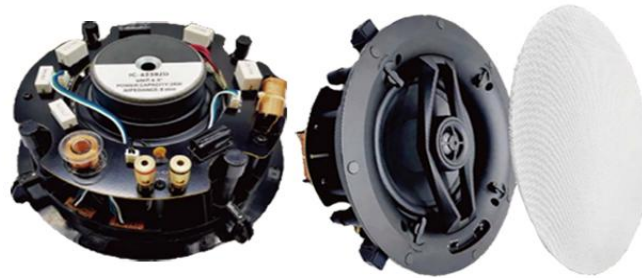

Description

The DSP6030 is a high-quality coaxial ceiling speaker designed for easy installation and excellent sound performance. With its compact size and sleek design, it is perfect for a variety of application places, including conference rooms, classrooms, restaurants, hotels, and retail stores.

The 2-position front-mounted ± 3 dB bass & treble switches allow for easy customization of the sound to fit any space, while the 70V/100V/30W/15W/7.5W/3.75W & 8 ohms compatibility makes it versatile for use in different sound systems. Whether you need background music or clear, intelligible sound for speeches and presentations, the DSP6030 is an ideal solution for your audio needs.

Features

- 6.5"PP Cone ,1"Pivoting Silk Soft Dome
- Convenient and automatic installation
- 2-Position Front-Mounted ± 3 dB Bass & Treble Switches
- Frequency Range ± 3 :55 Hz-20k Hz
- Power Handling RMS :80 W program ,40 W (IEEE 219)
- Sensitivity : 88 dB
- 70V/100V/30W/15W/7.5W/3.75W & 8 ohms
- Termination : Standard pressed connector
- Dimension(H*W) : 248.5mm x 108mm
- Cut Out Diameter :8.23" (209mm)
- Material : ABS

Specifications

Model	DSP6030
Speaker Type	6.5" In-Ceiling Home Theater Speakers
Tweeter	1" Pivoting Silk Soft Dome
Woofers	6.5" PP Cone
Impedance	8 Ω
Sensitivity	88dB 1W/1m
Contour Switches	2-Position Front-Mounted \pm 3dB Bass & Treble Switches
Frequency Response	55Hz-20KHz
Rated Power	30 Watts
Power Handling	60 Watts
Dimensions (W*H)	22.9cm*11.2cm
Ceiling Cut Out: Unit of Measure	20.4cm Pcs
Transformer	70V/100VV/30W/15W/7.5W/3.75W