

DSP188 DSP288 DSP388

15W 30W 45W Double-Sided Waterproof Column Speaker



Description

DSP188/DSP288/DSP388 Double-Sided Waterproof Column Speakers are designed to provide clear and bright sound with wide coverage for both indoor and outdoor applications. Built with waterproof drivers and supporting 70V/100V operation with selectable terminals, they offer flexible power options to meet diverse installation needs. With a rugged all-weather design and mounting bracket, they ensure easy installation and long-lasting performance.

Features

- Double-sided sound projection with ample volume, designed for all-weather use, suitable for both indoor and outdoor environments.
- Maximum sound pressure level: 99/102/103±2dB, effective frequency range: 140Hz-14kHz.
- Weight: 3/5.5/8kg, equipped with mounting bracket for easy installation.
- Operating voltage: 70/100V, rated power: 15/30/45W, with multiple selectable terminals to suit different applications.
- Built-in waterproof drivers with long lifespan and high sensitivity (89±2dB), delivering clear and bright sound.


Specifications

Model	DSP188	DSP288	DSP388
Speaker Unit	4"×2, 2.5"×2	4"×4, 2.5"×2	4"×6, 2.5"×2
Rated Power	15W	30W	45W
Operating Voltage	70V/100V	70V/100V	70V/100V

Power	70V	8W-15W	15W-30W	23W-45W
Adjustment	100V	15W	30W	45W
Sensitivity		89±2dB	89±2dB	89±2dB
MAX. SPL.		99±2dB	102±2dB	103±2dB
Frequency Response		140Hz-14kHz	140Hz-14kHz	140Hz-14kHz
Dimensions		160×250×310mm	160×250×410mm	160×250×510mm
Weight		3kg	5.5kg	8kg

Product Information

Frequency Response
(dB SPL, 1W, 1m)

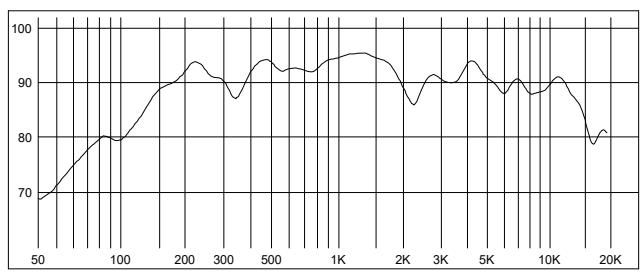

Distortion
(THD<1.5% 1W, 1m, 200Hz-10kHz)

