

DSP7052C

5" 20W Ceiling Speaker with Rear Cover



Description


The DSP7052C is a ceiling speaker. It delivers an ideal sound reinforcement solution with its minimalist design, stylish appearance and excellent audio performance, making it well-suited for homes, offices and commercial spaces. Its sleek design seamlessly blends into any decor, while its easy installation and durable construction ensure a hassle-free, long-lasting audio experience.

Features

- Compact ceiling-mounted design with a minimalist and stylish appearance
- Delivers clear and balanced sound for background and foreground audio applications
- Multi-tapping 70V/100V line voltage and 8Ω constant impedance operation
- Multiple power taps for flexible system design and installation
- Wide 130° coverage angle ensures even sound distribution
- High sensitivity for improved audio efficiency and performance
- Wide frequency response from 100 Hz to 20 kHz for full-range sound reproduction
- Easy and secure installation suitable for various ceiling types
- Durable construction with long service life
- Neutral white finish blends seamlessly into most interior environments

| Model | DSP7052C |
|---------------------------|-------------------|
| Rated Power | 20W |
| Constant Voltage 70V | 1.25W/2.5W/5W/10W |
| Constant Voltage 100V | 2.5W/5W/10W/20W |
| Constant Impedance 8Ω | 20W |
| Sensitivity | 88dB |
| Frequency response(-10dB) | 100-20KHz |
| Coverage angle(1KHz/-6dB) | 130° |
| Dimension(W×D) | φ203×145mm |
| Weight | 1.7kg |
| Color | White |


Product Information

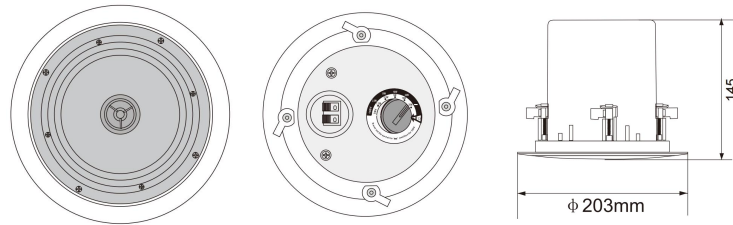

Product Installation

1.Step one:Open a φ180mm hole in the ceiling.

2.Step two:Remove the mesh mask.



3.Step three:Press the open hole in advance, install the product to the ceiling,and lock the screws.

4.Step four:After the product is fixed,reload the mesh mask.

